

Thursday's Gossan Porphyry Copper-Gold Project – Diamond Drilling Update

Latest Drill Assays Confirm Southerly Plunge of Copper-Gold Mineralised North-South Structure

New results from diamond hole SMD045W2 demonstrate consistency of the high-grade copper-gold mineralisation hosted within the North-South Structure, confirming the southerly plunge and providing a vector to the causative copper-gold porphyry at depth

Highlights

- Diamond drill hole SMD045W2, drilled to target the North-South Structure (NSS) below the intercept of 16m at 1.30% Cu and 0.15g/t Au from 1,077m in SMD045, returned the following intercepts:
 - 74m @ 0.31% Cu from 531m down-hole including:
 - 28m @ 0.42% Cu from 558m down-hole;
 - 3m @ 1.12% Cu, 0.26g/t Au and 11g/t Ag from 859m down-hole;
 - 12m @ 0.51% Cu, 0.10g/t Au and 2g/t Ag from 1,129m down-hole in the NSS, including:
 - 4m @ 0.91% Cu, 0.12g/t Au and 2g/t Ag from 1,133m;
 - 2m @ 0.94% Cu, 0.1g/t Au and 3g/t Ag from 1,147m down-hole in the NSS.
- The copper-gold-silver mineralisation is associated with sericite-chlorite 'phyllitic' altered host-rocks, interpreted to be located above the source porphyry.
- In conjunction with previous intercepts, these results are interpreted to reflect a steep south-plunging conduit for the mineralising fluids.
- This provides a clear vector to the causative copper-gold porphyry at depth. Deep drill-hole SMD049 is currently in-progress at ~1,100m drill depth to test the position beneath these intercepts.

Stavelly Minerals Limited (ASX Code: **SVY** – “Stavelly Minerals”) is pleased to report further assays from recently completed diamond drilling at the **Thursday's Gossan prospect**, part of its 100%-owned Stavelly Copper-Gold Project in western Victoria (Figures 1, 2 and 3), where recent drilling continues to provide the Company with confirmation of a strong vector to the target porphyry at depth.

The latest results, from wedge hole SMD045W2, provide further evidence of the consistency of higher grade mineralisation hosted within the North-South Structure (NSS) and confirm the strong southerly plunge of this zone, providing a clear vector to the targeted causative porphyry at depth.

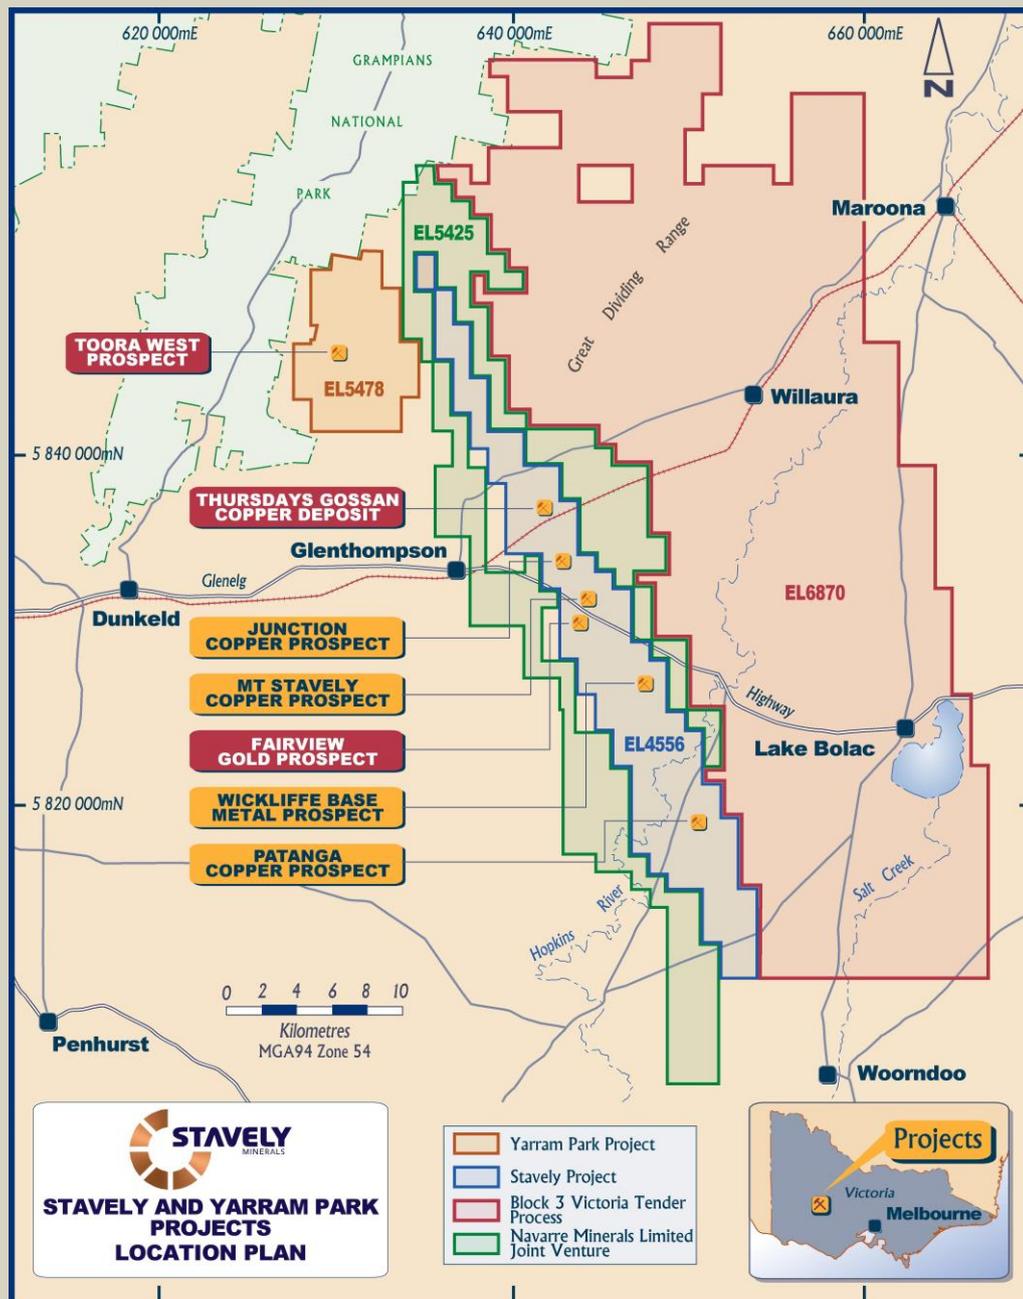


Figure 1. Stavely Project location map.

Diamond drill hole wedge SMD045W2, drilled to target the (North-South Structure) NSS below the intercept reported in SMD045, has returned a broad zone of moderate grade copper and several higher-grade copper-gold intercepts:

- **74m @ 0.31% copper from 531m down-hole including:**
 - 23m @ 0.28% copper, 0.13g/t gold and 4g/t silver from 531m down-hole; and
 - 28m @ 0.42% copper from 558m down-hole
- **3m @ 1.12% copper, 0.26g/t gold and 11g/t silver from 859m down-hole (Photo 1)**

In the NSS:

- **12m @ 0.51% copper, 0.1g/t gold and 2g/t silver from 1,129m down-hole, including:**
 - 4m @ 0.91% copper, 0.12g/t gold and 2g/t silver from 1,133m (Photo 2)

- 6m of late mineral dacite from 1,141m down-hole
- **2m @ 0.94% copper, 0.1g/t gold and 3g/t silver from 1,147m down-hole (Photo 3)**



Photo 1. Massive pyrite with minor chalcopyrite vein at 860.5m in SMD045W2.



Photo 2. Pyrite breccia with quartz, bornite and chalcocite in-fill at 1,133.0m in SMD045W2.



Photo 3. Quartz-pyrite-molybdenite \pm colusite \pm tennantite-tetrahedrite veining at 1,148.4m in SMD045W2.

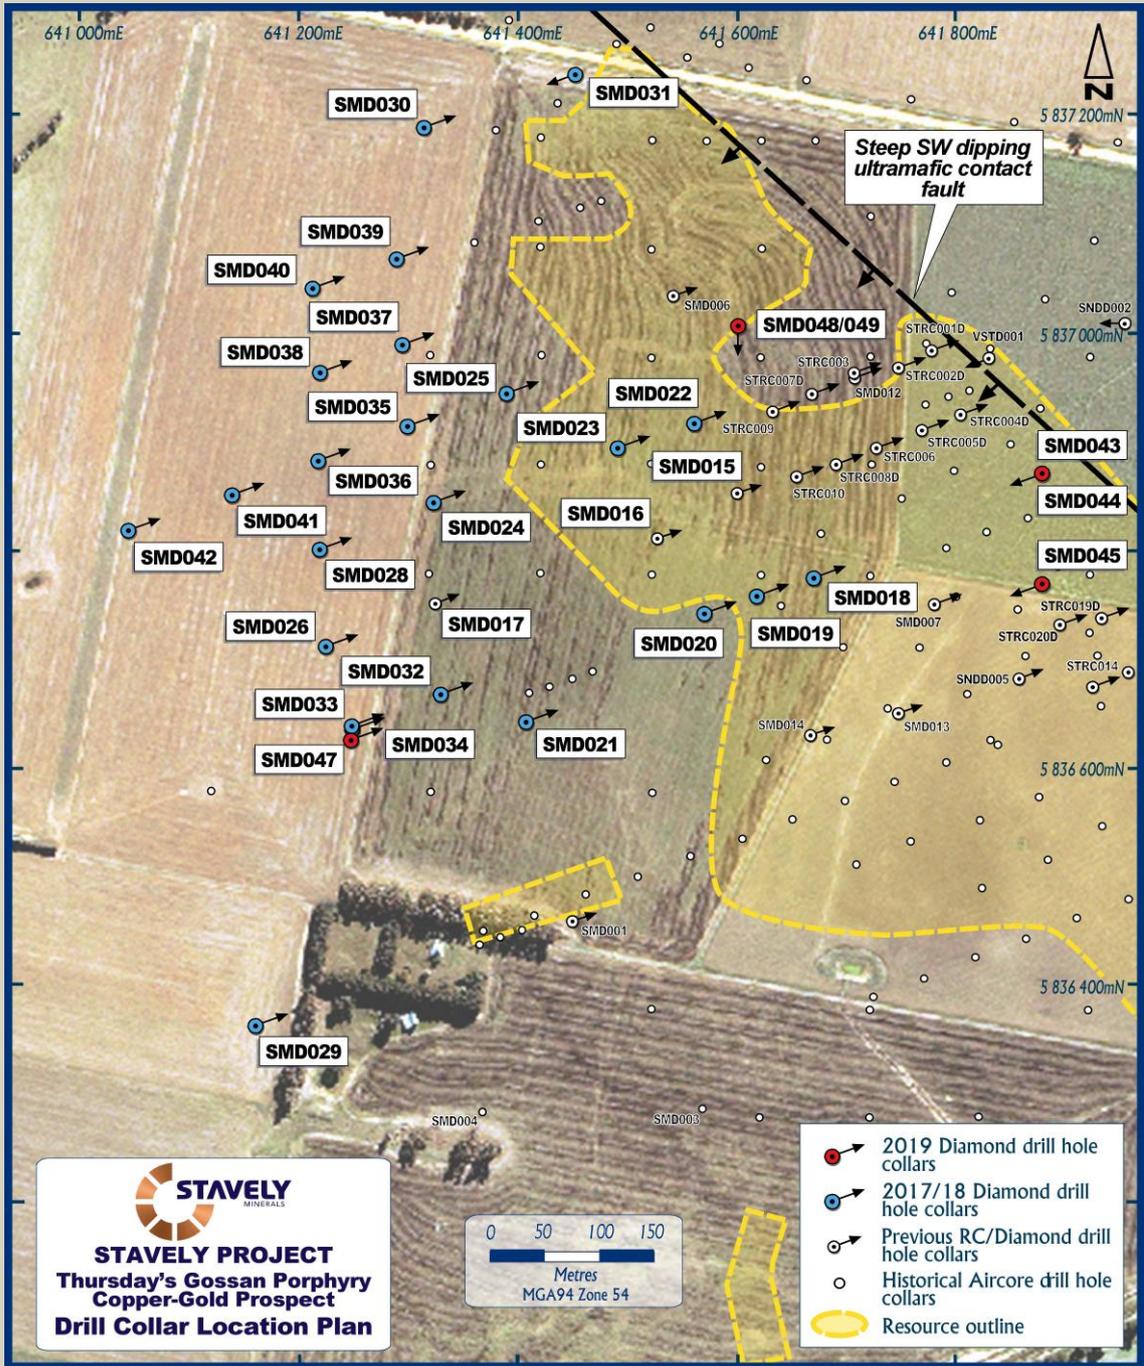


Figure 2. Thursday's Gossan drill collar location plan.

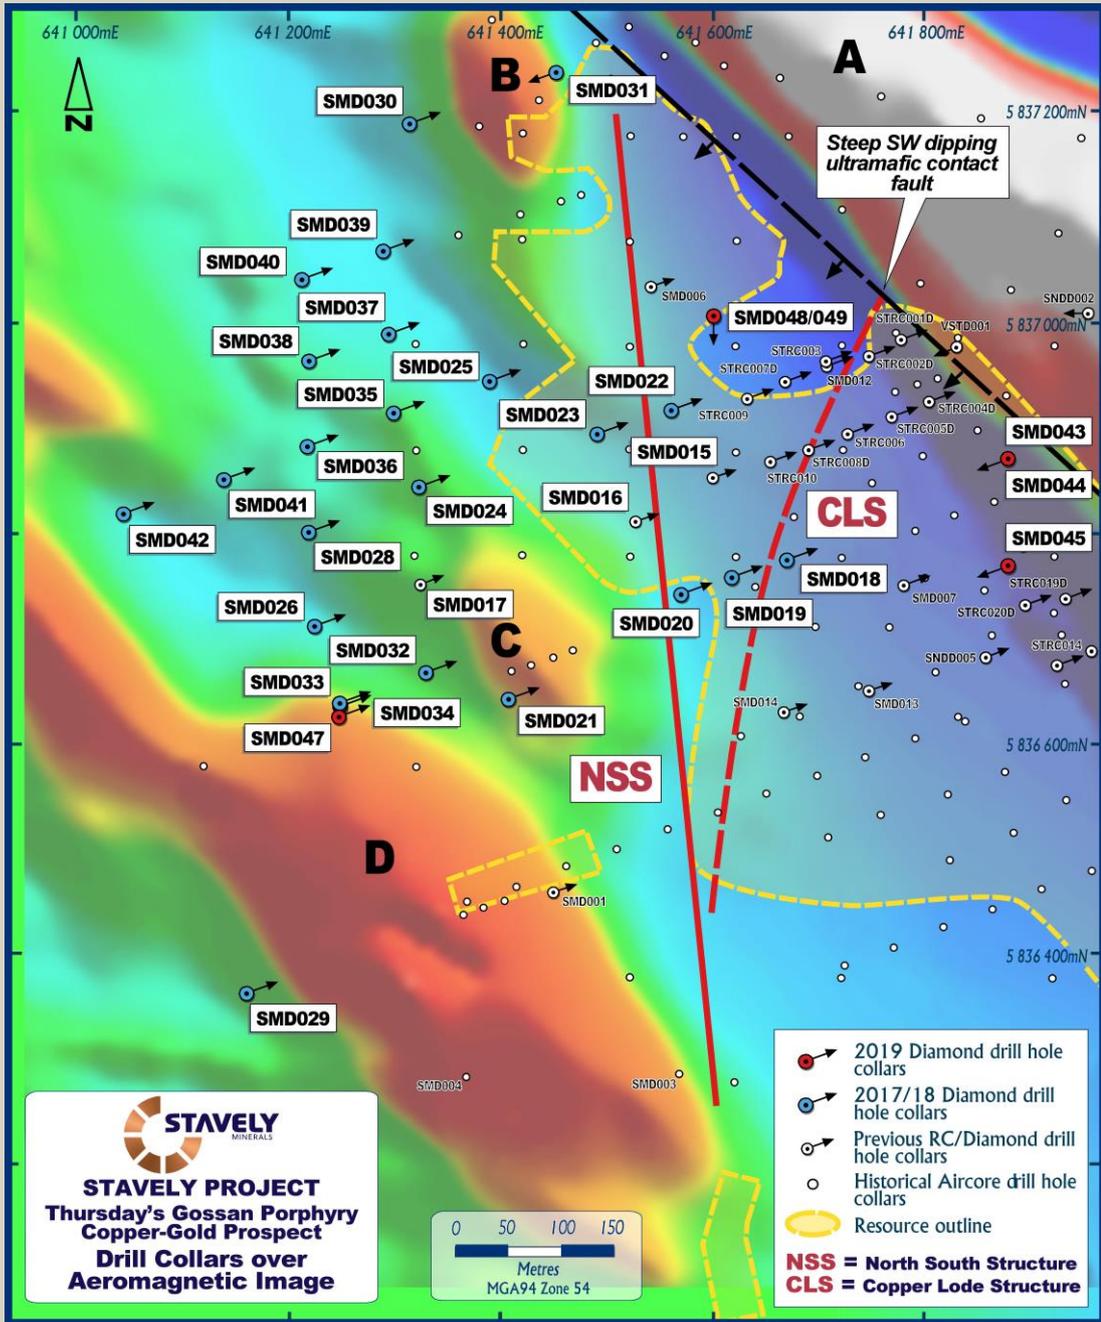


Figure 3. Aeromagnetic image with drill collars and the surface projection of the North-South Structure and the Copper Lode Splay.

As previously reported (see ASX announcement 18 June 2019) diamond drill hole SMD045 has returned high-grade copper-gold mineralisation on the NSS, with assay results including:

- 307m at 0.22% copper from 15m down-hole, including:
 - 23m at 0.53% copper, 0.43g/t gold and 3.5g/t silver from 51m down-hole, including:
 - 3m at 2.38% copper, 2.12g/t gold and 12.2g/t silver from 51m, including:
 - 1m at 5.05% copper, 6.06g/t gold and 20.9g/t silver from 52m

- 92m at 0.30% copper from 215m drill depth, including:
 - **8m at 0.93% copper, 0.26g/t gold and 8.8g/t silver** from 218m
- 17m at 0.29% copper, 0.15g/t gold and 4.6g/t silver from 531m, including:
 - 2m at 0.42% copper, 0.57g/t gold and 12.1g/t silver from 546m
- 27m at 0.53g/t gold from 567m, including:
 - 3m at 1.99g/t gold from 578m

In the NSS:

- 2m at 0.55% copper, 0.14g/t gold from 1,063m down-hole
- 12m of late mineral dacite from 1,065m
- **16m at 1.30% copper, 0.15g/t gold and 2.8g/t silver** from 1,077m, including
 - **2m at 2.90% copper, 0.27g/t gold and 3.9g/t silver** from 1,091m
- 10m of late mineral dacite from 1,093m
- 11m at 0.39% copper from 1,103m

SMD045W1, (see ASX announcement 18 June 2019) drilled to target the NSS 170m vertically above the intercept in SMD045, also returned significant assay results including:

- 30m at 0.23% copper from 465m down-hole, including
 - **5m at 0.22% copper, 0.71g/t gold and 5.5g/t silver** from 474m
- 25m at 0.23% copper, 0.14g/t gold and 2.5g/t silver from 528m
- **9m at 0.28% copper, 0.21g/t gold and 4.9g/t silver** from 719m

In the NSS – not well-mineralised with 3m at 0.30% copper from 942m

- 3m at 0.49% copper, 0.16g/t gold and 2.4g/t silver from 1,053m

The high-grade intercepts in mineralised structures in recent drill holes SMD045, SMD045W1 and SMD045W2, together with previous drill holes, in particular SMD044 and SMD044W1, have provided a vector to the causative copper-gold porphyry at depth.

Drill hole SMD044 intersected multiple zones of high-grade copper-gold mineralisation (see ASX announcement 12 March 2019) including:

- **10m at 2.43% copper and 0.30g/t gold** from the Copper Lode Splay (CLS) structure, and
- **38.3m at 1.59% copper and 0.27g/t gold** from the NSS, including
 - **6m at 2.75% copper, 0.25g/t gold and 7g/t silver**
 - **12.3m at 2.59% copper, 0.44g/t gold and 18g/t silver**, including
 - **6.3m at 3.93% copper, 0.67g/t gold and 27g/t silver**

In drill hole SMD044W1, the highest-grade intercepts over meaningful widths to date were intersected (see ASX announcement 23 April 2019) with:

- **18m at 3.62% copper, 0.28g/t gold and 15g/t silver** including
 - **2m at 15.7% copper, 1.07g/t gold and 65g/t silver** on the NSS.

When modelling in the plane of the NSS, these intercepts appear to reflect a steep southerly plunge to the well-developed high-grade copper-gold-silver mineralisation.

This trend also appears to be reflected in a number of different data sets including sulphur abundance, potassium and strontium geochemistry, vanadium over scandium ratios (reflecting an evolved porphyry fluid source) short-wavelength white mica infra-red absorption features (as reflecting proximity to a source porphyry), light sulphur isotopes (also reflecting proximity to an oxidised magmatic source) and other alteration mineralogy, copper sulphide species, the distribution of disseminated and vein-hosted sulphate minerals and vein characteristics.

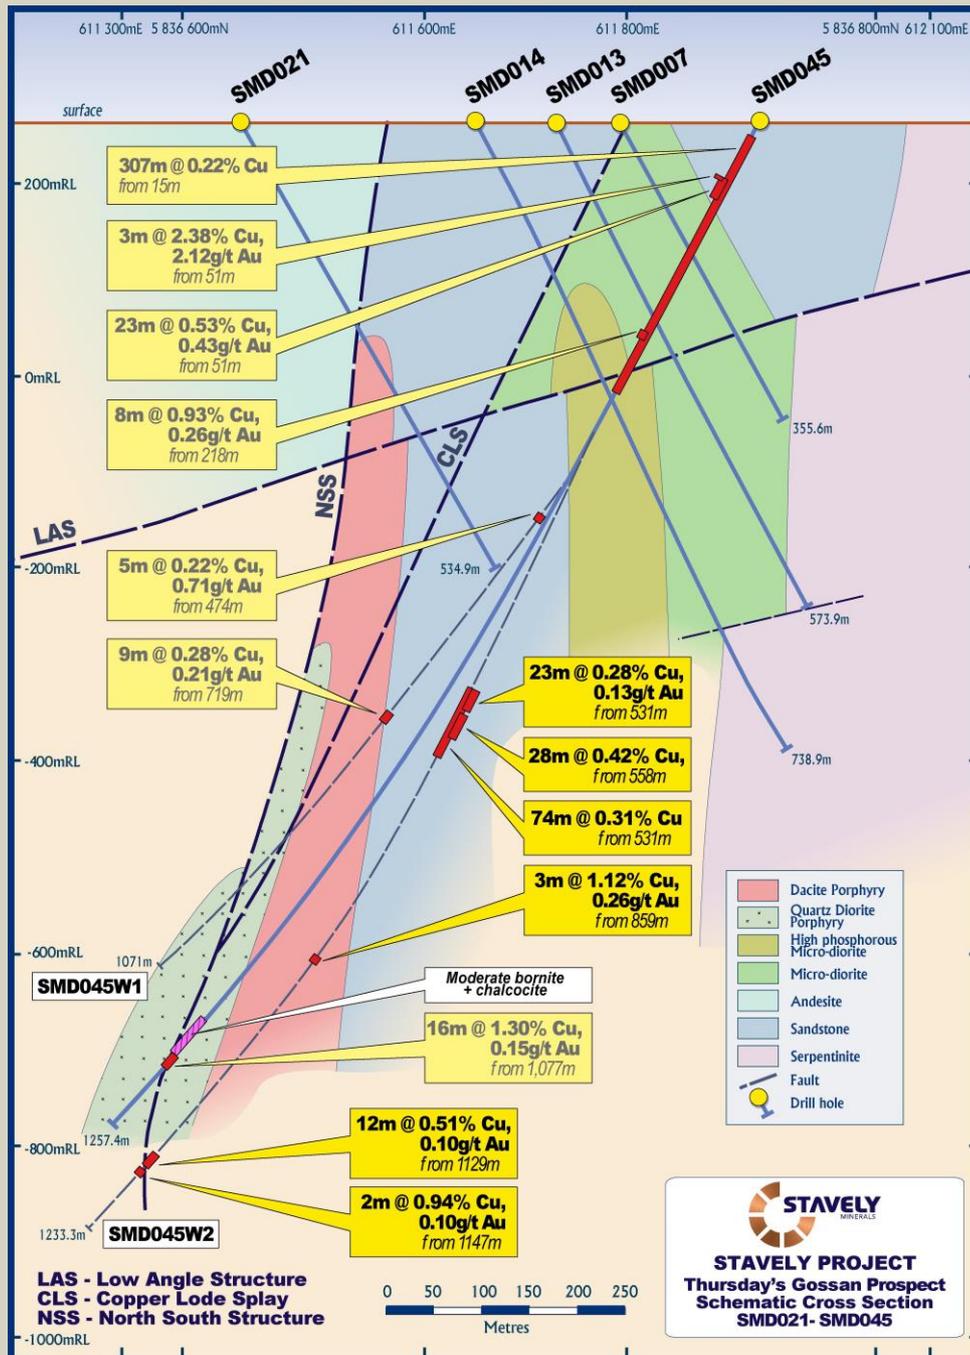


Figure 4. SMD045 drill section.

Deep drill hole SMD049 (a re-drill of SMD048 which failed at 61m due to a collar wash-out) is planned to a depth of 1,500m, and is being drilled at -70 degrees to 196 degrees azimuth to drill directly down the plunge of the interpreted structural 'conduit' for fluids emanating from the porphyry at depth.

This drill hole is currently in progress (~1,100m drill depth), is being drilled parallel to the NSS, and is not expected to intercept it. The primary target is the causative copper-gold porphyry at depth. Post-completion wedges may be undertaken to intercept the NSS at various depths.

Yours sincerely,



Chris Cairns
Managing Director

The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr Chris Cairns, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr Cairns is a full-time employee of the Company. Mr Cairns is the Managing Director of Stavelly Minerals Limited, is a substantial shareholder of the Company and is an option holder of the Company. Mr Cairns has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Cairns consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

For Further Information, please contact:

Stavelly Minerals Limited

Phone: 08 9287 7630

Email: info@stavelly.com.au

Media Inquiries:

Nicholas Read – Read Corporate

Phone: 08 9388 1474

Thursday's Gossan Prospect – Collar Table

MGA 94 zone 54							
Hole id	Hole Type	East	North	Dip/ Azimuth	RL (m)	Total Depth (m)	Comments
SMD017	DD	641325	5836750	-60/070	262	793.6	
SMD018	DD	641670	5836772	-60/070	264	96.3	Hole failed did not reach target depth
SMD019	DD	641620	5836755	-60/070	264	477.5	
SMD020	DD	641570	5836740	-60/070	264	465.4	
SMD021	DD	641410	5836640	-60/070	264	534.9	
SMD022	DD	641560	5836915	-60/070	264	406.2	
SMD023	DD	641490	5836895	-60/070	264	330.6	
SMD024	DD	641315	5836835	-60/070	264	509.6	
SMD025	DD	641390	5836940	-60/070	264	399.2	
SMD026	DD	641225	5836710	-60/070	264	796	
SMD028	DD	641220	5836800	-60/070	264	777.3	
SMD029/ SMD029W1	DD	641164	5836363	-60/070	264	384/ 837.5	Hole wedged due to drilling problems in original hole
SMD030	DD	641315	5837185	-60/070	264	109.4	Hole failed did not reach target depth
SMD031	DD	641455	5837235	-60/250	264	409.5	Redrill of SMD030 from opposite direction
SMD032	DD	641330	5836665	-60/070	264	582.8	
SMD033	DD	641250	5836635	-60/070	264	121.2	Drilling issues resulted in hole being abandoned
SMD034	DD	641250	5836635	-60/070	264	150	Redrill of SMD033, hole failed did not reach target depth
SMD035	DD	641300	5836910	-60/070	264	615.3	
SMD036	DD	641220	5836880	-60/070	264	654.2	
SMD037	DD	641295	5836985	-60/070	264	485.9	
SMD038	DD	641220	5836960	-60/070	264	573.5	
SMD039	DD	641290	5837065	-60/070	264	471.4	
SMD040	DD	641215	5837040	-60/070	264	570.4	
SMD041	DD	641140	5836850	-60/073	264	850	
SMD042	DD	641044	5836815	-60/070	264	1001.5	
SMD043	DD	641880	5836870	-60/250	264	249.1	Was terminated due to hole deviating from target
SMD044	DD	641880	5836870	-63/245	264	1189.4	
SMD044W1	DD	641880	5836870	-63/245	264	1008.4	Wedged off SMD044 at 536.8m
SMD045	DD	641930	5836765	-63/236	264	1257.4	
SMD045W1	DD	641930	5836765	-63/236	264	1071	Wedged off SMD045 at 417m
SMD045W2	DD	641930	5836765	-63/236	264	1233.3	Wedged off SMD044 at 403m
SMD046	DD	642197	5836010	-63/234.5	264	636.9	
SMD047	DD	641250	5836630	-60/070	264	842.5	
SMD048	DD	641600	5837000	-70/185.5	264	61.6m	Hole failed
SMD049	DD	641601	5837002	-70/185.5	264	In progress	Re-drill of SMD048

Thursday's Gossan Prospect – Intercept Table													
		MGA 94 zone 54					Intercept						Comments
Hole id	Hole Type	East	North	Dip/ Azimuth	RL (m)	Total Depth (m)	From (m)	To (m)	Width (m)	Cu (%)	Au (g/t)	Ag (g/t)	
SMD045W2	DD	641930	5836765	-63/236	264	1233.3	531	605	74	0.31			
						Incl	531	554	23	0.28	0.13	4	
						and	558	586	28	0.42			
							859	862	3	1.12	0.26	11	
							1129	1141	12	0.51	0.10	2	In NSS
						Incl	1133	1137	4	0.91	0.12	2	
							1147	1149	2	0.94	0.10	3	In NSS

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' RC Drilling</p> <p>Reverse Circulation (RC) percussion drilling was used to produce a 1m bulk sample (~25kg) which was collected in plastic bags and representative 1m split samples (12.5% or nominally 3kg) were collected using a cone splitter and placed in a calico bag. The cyclone was cleaned out with compressed air at the end of each hole and periodically during the drilling. The 1m split samples were submitted for analysis.</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>The diamond core for intervals of interest, ie. those that contained visible sulphides as well as 5m above and below were sampled. PQ quarter core and HQ half core was submitted for analysis. Sample intervals were based on lithology but in general were 1m. No intervals were less than 0.4m or greater than 1.2m.</p>
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond and RC Drilling</p> <p>Sample representivity was ensured by a combination of Company Procedures regarding quality control (QC) and quality assurance/ testing (QA). Certified standards and blanks were inserted into the assay batches.</p>
	<i>Aspects of the determination of mineralisation that are Material to the Public Report - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Drill sampling techniques are considered industry standard for the Stavelly work programme.</p> <p>PQ quarter core and HQ half core was submitted for analysis. Sample intervals were based on lithology but in general were 1m. No intervals were less than 0.3m or greater than 1.8m.</p> <p>The diamond drill samples were submitted to Australian Laboratory Services ("ALS") in Adelaide, SA. Laboratory sample preparation involved:- sample crush to 70% < 2mm, riffle/rotary split off 1kg, pulverize to >85% passing 75 microns.</p> <p>Diamond core samples were analysed by ME-ICP61 – multi acid digest with HF and ICPAES and ICPMS and Au-AA23 – fire assay with AAS finish. For sample that returned Cu values greater than 10 000ppm (1%) re-assaying was conducted by OG62, which is a four acid digest with ICP-AES or AAS finish.</p>

Criteria	JORC Code explanation	Commentary
	<i>warrant disclosure of detailed information.</i>	<p>Stavelly Minerals' RC Drilling</p> <p>Drill sampling techniques are considered industry standard for the Stavelly work programme.</p> <p>The 1m split samples were submitted to Australian Laboratory Services ("ALS") in Orange, NSW. Laboratory sample preparation involved:- sample crush to 70% < 2mm, riffle/rotary split off 1kg, pulverize to >85% passing 75 microns.</p> <p>The RC samples were analysed by ME-ICP61 – multi acid digest with HF and ICPAES and ICPMS and Au-AA23 – fire assay with AAS finish.</p>
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Diamond drill holes were drilled by Titeline Drilling in 2014 (SMD001, SMD003 and SMD004) and 2017 (SMD006, SMD007, SMD008 and SMD012). Diamond tails were completed on drill holes STRC001D, STRC002D, STRC004D, STRC005D, STRC007D, STRC008D, STRC019D and STRC020D. Holes SMD013, SMD014 and SMD015 were drilled in 2017 by Titeline Drilling. Holes SMD016, SMD017, SMD018, SMD019, SMD020, SMD021, SMD022, SMD023, SMD024, SMD025, SMD026, SMD028, SMD029, SMD029W, SMD030, SMD031, SMD032, SMD033, SMD034, SMD035, SMD036, SMD037, SMD038, SMD039, SMD040, SMD041 and SMD042 were drilled in 2018 by Titeline Drilling. Hole SMD043, SMD044, SMD044W1, SMD045, SMD045W1, SMD045W2, SMD046, SMD047 and SMD048 were drilled by Titeline Drilling in 2019. SMD049 is in progress. For the diamond holes, drilling was used to produce drill core with a diameter of 85mm (PQ) from surface until the ground was sufficiently consolidated and then core with a diameter of 63.5mm (HQ) was returned. For the diamond tails, drilling was used to produce drill core with a diameter of 63.5mm (HQ).</p> <p>Diamond drilling was standard tube. Diamond core was orientated by the Reflex ACT III core orientation tool.</p> <p>SMD003 was orientated at -60° towards azimuth 060° to a depth of 522.3m.</p> <p>SMD006, SMD007 and SMD008 were orientated at -60° towards azimuth 070° to depths of 353.3m, 355.6m and 240m respectively. SMD012 was orientated at -60° towards azimuth 065° to a depth of 206.6m.</p> <p>SMD013, SMD014 and SMD015 were orientated at -60° towards azimuth 070° to depths of 573.9m, 738.9m and 448.1m respectively. SMD016 was orientated at -60° towards azimuth 080° to a depth of 467.6m.</p> <p>The dips, azimuths and depths of holes SMD017 to SMD026, inclusive, and SMD028 to SMD048, inclusive, are provided in the Thursday's Gossan Prospect Collar Table.</p>

Criteria	JORC Code explanation	Commentary
		<p>Stavely Minerals' RC Drilling</p> <p>The RC holes were drilled by Budd Exploration Drilling P/L. The RC percussion drilling was conducted using a UDR 1000 truck mounted rig with onboard air. A Sullair 350/1150 auxiliary compressor was used. 4" RC rods were used and 5¹/₄" to 5³/₄" drill bits. A Reflex Digital Ezy-Trac survey camera was used.</p> <p>The holes were oriented at -60° towards azimuth 070°.</p>
<p>Drill sample recovery</p>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p>	<p>Stavely Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavely Minerals' Diamond Drilling</p> <p>Diamond core recoveries were logged and recorded in the database.</p> <p>Core recovery for SMD001, SMD003 and SMD007 was good. In general, the core recovery for SMD012 was good but there were several intervals where core was lost or there was poor core recovery.</p> <p>Core recoveries for SMD013, SMD014, SMD015, SMD016, and SMD017 were generally very good, with the vast majority of intervals returning +95% recovery and only a few intervals, mainly near the surface, returning poor (<50%) recoveries. Core recoveries for SMD018, SMD019, SMD020, SMD021, SMD022, SMD023 and SMD024 were good with the holes averaging above 92% recovery for the total hole. Core recovery for SMD025 averaged 84.5%. Core recovery for SMD026 and SMD028 was 91% and 95% respectively. Core recovery for SMD029 was 90% and for SMD029W was 93%. The core recovery for SMD030 was not good, at an average of 69%. SMD030 was abandoned at 109m. Core recovery for SMD031 averaged 92%. Core recovery for SMD032 averaged 93%.</p> <p>Core recovery for SMD033 was good averaging 91%, however the hole was lost at 121.2m.</p> <p>Core recovery for SMD034 was good averaging 90%, however the hole was lost at 150m.</p> <p>Core recovery for SMD035 was good averaging 94%.</p> <p>Core recovery for SMD036 was good averaging 93%.</p> <p>Core recovery for SMD037 was very good averaging 97%.</p> <p>Core recovery for SMD038 was very good averaging 96%.</p> <p>Core recovery for SMD039 was very good averaging 97%.</p> <p>Core recovery for SMD040 was very good averaging 96%.</p> <p>Core recovery for SMD041 was very good averaging 97%.</p> <p>Core recovery for SMD042 was very good averaging 97%.</p> <p>Core recovery for SMD043 was very good averaging 96%.</p> <p>Core recovery for SMD044 was very good averaging 98%.</p> <p>Core recovery for SMD044W1 was very good averaging 96%.</p> <p>Core recovery for SMD045 was very good averaging 98%.</p> <p>Core recovery for SMD045W1 was very good averaging 98%.</p>

Criteria	JORC Code explanation	Commentary
		<p>Core recovery for SMD045W2 was very good averaging 98%.</p> <p>Core recovery for SMD046 was good averaging 95%.</p> <p>Core recovery for SMD047 was good averaging 95%.</p> <p>Core recovery for SMD048 averaged 92%.</p> <p>Stavelly Minerals' RC Drilling</p> <p>RC sample recovery was good. Booster air pressure was used to keep the samples dry despite the hole producing a significant quantity of water. RC sample recovery was visually checked during drilling for moisture or contamination.</p>
	<p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Diamond core is reconstructed into continuous runs on an angle iron cradle for orientation marking. Depths are checked against the depth given on the core blocks and rod counts are routinely carried out by the driller.</p> <p>Stavelly Minerals' RC Drilling</p> <p>The RC samples are collected by plastic bag directly from the rig-mounted cyclone and laid directly on the ground in rows of 10. The drill cyclone and sample buckets are cleaned between rod-changes and after each hole to minimise down-hole and/or cross contamination.</p>
	<p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Not an issue relevant to diamond drilling.</p> <p>Stavelly Minerals' RC Drilling</p> <p>No analysis has been undertaken as yet regarding whether sample bias may have occurred due to preferential loss/gain of fine/coarse material and is not considered to have a material effect given the good sample recovery.</p>
<p>Logging</p>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond and RC Drilling</p> <p>Geological logging of samples followed Company and industry common practice. Qualitative logging of samples including, but not limited to, lithology, mineralogy, alteration, veining and weathering. Diamond core logging included additional fields such as structure and geotechnical parameters.</p> <p>Magnetic Susceptibility measurements were taken for each 1m RC and diamond core interval.</p>

Criteria	JORC Code explanation	Commentary
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>All logging is quantitative, based on visual field estimates. Systematic photography of the diamond core in the wet and dry form was completed.</p> <p>Stavelly Minerals' RC Drilling</p> <p>All logging is quantitative, based on visual field estimates. Chip trays with representative 1m RC samples were collected and photographed then stored for future reference.</p>
	<i>The total length and percentage of the relevant intersections logged.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Detailed diamond core logging, with digital capture, was conducted for 100% of the core by Stavelly Minerals' on-site geologist at the Company's core shed near Glenthompson.</p> <p>Stavelly Minerals' RC Drilling</p> <p>All RC chip samples were geologically logged by Stavelly Minerals' on-site geologist on a 1m basis, with digital capture in the field.</p>
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond Drilling</p> <p>Quarter core for the PQ diameter diamond core and half core for the HQ diameter core was sampled on site using a core saw.</p>
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' RC Drilling</p> <p>Splitting of RC samples occurred via a rotary cone splitter by the RC drill rig operators. Cone splitting of RC drill samples occurred regardless of whether the sample was wet or dry.</p>
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond and RC Drilling</p> <p>Company procedures were followed to ensure sub-sampling adequacy and consistency. These included, but were not limited to, daily work place inspections of sampling equipment and practices.</p>
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Stavelly Minerals' Diamond and RC Drilling</p> <p>Blanks and certified reference materials are submitted with the samples to the laboratory as part of the quality control procedures.</p>

Criteria	JORC Code explanation	Commentary
	<p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p>	<p>Stavely Project Thursday's Gossan Prospect Stavely Minerals' Diamond and RC Drilling</p> <p>No second-half sampling of the diamond core or field duplicates for the RC drilling has been conducted at this stage.</p>
	<p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>Stavely Project Thursday's Gossan Prospect Stavely Minerals' Diamond and RC Drilling</p> <p>The sample sizes are considered to be appropriate to correctly represent the sought mineralisation.</p>
<p>Quality of assay data and laboratory tests</p>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p>	<p>Stavely Project Thursday's Gossan Prospect Stavely Minerals' Diamond and RC Drilling</p> <p>The core samples and 1m RC split samples were analysed by multielement ICPAES Analysis - Method ME-ICP61. A 0.25g sample is pre-digested for 10-15 minutes in a mixture of nitric and perchloric acids, then hydrofluoric acid is added and the mixture is evaporated to dense fumes of perchloric (incipient dryness). The residue is leached in a mixture of nitric and hydrochloric acids, the solution is then cooled and diluted to a final volume of 12.5mls. Elemental concentrations are measured simultaneously by ICP Atomic Emission Spectrometry. This technique approaches total dissolution of most minerals and is considered an appropriate assay method for porphyry copper-gold systems.</p> <p>For samples which returned a Cu assay value in excess of 10,000ppm (1%) the pulp was re-assayed using Cu-OG62 which has a detection limit of between 0.001 and 40% Cu. This technique is a four acid digest with ICP-AES or AAS finish.</p> <p>The core samples and 1m RC split samples were also analysed for gold using Method Au-AA23. Up to a 30g sample is fused at approximately 1,100°C with alkaline fluxes including lead oxide. During the fusion process lead oxide is reduced to molten lead which acts as a collector for gold. When the fused mass is cooled the lead separates from the impurities (slag) and is placed in a cupel in a furnace at approximately 900°C. The lead oxidizes to lead oxide, being absorbed by the cupel, leaving a bead (prill) of gold, silver (which is added as a collector) and other precious metals. The prill is dissolved in aqua regia with a reduced final volume. Gold content is determined by flame AAS using matrix matched standards. For samples which are difficult to fuse a reduced charge may be used to yield full recovery of gold. This technique approaches total dissolution of most minerals and is considered an appropriate assay method for detecting gold mineralisation.</p>

Criteria	JORC Code explanation	Commentary
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	<p>Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond and RC Drilling</p> <p>Laboratory QAQC involved the submission of standards and blanks. For every 20 samples submitted either a standard or blank was submitted.</p> <p>The analytical laboratory provide their own routine quality controls within their own practices. The results from their own validations were provided to Stavelly Minerals.</p> <p>Results from the CRM standards and the blanks gives confidence in the accuracy and precision of the assay data returned from ALS.</p>
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	<p>Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond and RC Drilling</p> <p>Either Stavelly Minerals' Managing Director or Technical Director has visually verified significant intersections in the core and RC chips at Thursday's Gossan.</p>
	<i>The use of twinned holes.</i>	No twinned holes have been drilled.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	<p>Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond and RC Drilling</p> <p>Primary data was collected for drill holes using the OCRIS logging template on Panasonic Toughbook laptop computers using lookup codes. The information was sent to a database consultant for validation and compilation into a SQL database.</p>
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations were made to any assay data used in this report.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	<p>Stavelly Project Thursday's Gossan & Mount Stavelly Prospects Stavelly Minerals' Diamond and RC Drilling</p> <p>Drill collar locations were pegged before drilling and surveyed using Garmin handheld GPS to accuracy of +/- 3m. Collar surveying was performed by Stavelly Minerals' personnel. This is considered appropriate at this early stage of exploration.</p> <p>For the diamond holes, down-hole single shot surveys were conducted by the drilling contractor. Surveys were conducted at approximately every 30m down-hole.</p>

Criteria	JORC Code explanation	Commentary
	<i>Specification of the grid system used.</i>	The grid system used is GDA94, zone 54.
	<i>Quality and adequacy of topographic control.</i>	At the Thursday's Gossan and Mount Stavelly prospect topographic control is achieved via use of DTM developed from a 2008 airborne magnetic survey conducted by UTS contractors measuring relative height using radar techniques. For Stavelly Minerals' exploration, the RL was recorded for each drill hole and soil sample location from the GPS. Accuracy of the GPS is considered to be within 5m.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	The drill hole spacing is project specific, refer to figures in text.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	No Mineral Resource and Ore Reserve estimation procedure(s) and classifications apply to the exploration data being reported.
	<i>Whether sample compositing has been applied.</i>	Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond Drilling Sample intervals were based on lithology but in general were 1m. No intervals were less than 0.4m or greater than 1.2m. Stavelly Minerals' RC Drilling No sample compositing has been applied.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond and RC Drilling The orientation of RC and diamond drill holes is tabulated in the Drill Hole Collar Table included in this report. As best as practicable, drill holes are designed to intercept targets and structures at a high angle. Some practical limitations apply in the context of collars being sited to avoid poor drilling conditions / bad ground. In the case of SMD044, the hole was drilled 180 degrees opposite (250° grid rather than 070° grid) to avoid known bad ground.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Stavelly Project Thursday's Gossan & Mount Stavelly Prospects Stavelly Minerals' Diamond and RC Drilling With SMD047 drilled to 070° grid azimuth, the drill hole has intersected the NSS and the CLS approximately perpendicularly.

Criteria	JORC Code explanation	Commentary
Sample security	<i>The measures taken to ensure sample security.</i>	Stavelly Project Thursday's Gossan Prospect Stavelly Minerals' Diamond and RC Drilling Samples in closed poly-weave bags were collected from the Company's Glenthompson shed by a contractor and delivered to either Ararat or Hamilton from where the samples are couriered to ALS Laboratory in Adelaide, SA.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews of the data management system has been carried out.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	Stavelly Project The diamond drilling and RC drilling at Thursday's Gossan and Mount Stavelly are located on EL4556, which forms the Stavelly Project. The mineralisation at Thursday's Gossan is situated within exploration licence EL4556. The Stavelly Project was purchased by Stavelly Minerals (formerly Northern Platinum) from BCD Resources Limited in May 2013. Stavelly Minerals hold 100% ownership of the Stavelly Project tenements. The Stavelly Project is on freehold agricultural land and not subject to Native Title claims. New Challenge Resources Pty Ltd retains a net smelter return royalty of 3% in EL4556, although there is an option to reduce this to 1% upon payment of \$500k.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Stavelly Project A retention licence, RL2017, was applied for over the majority of EL4556 in May 2014. The tenement is in good standing and no known impediments exist.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Stavelly Project Thursday's Gossan Prospect Exploration activity became focused on Thursday's Gossan and the Junction prospects following their discovery by Pennzoil of Australia Ltd in the late 1970s. North Limited continued to focus on Thursday's Gossan in the 1990s. North's best drill result at Thursday's Gossan came from VICT1D1 which gave 161m of 0.26% Cu from 43m, including 10m of 0.74% Cu from 43m from a supergene-enriched zone containing chalcocite.

Criteria	JORC Code explanation	Commentary
		<p>The tenement was optioned to CRA Exploration between 1995 and 1997. CRAE drilled several deep diamond drill holes into Thursday's Gossan, including DD96WL10, which intersected 186m from 41m of 0.15% Cu and DD96WL11, which intersected 261.7m from 38.3m of 0.13% Cu.</p> <p>EL4556 was further explored by Newcrest Operations Limited under option from New Challenge Resources Ltd between 2002 and 2004. Their main focus was Thursday's Gossan in order to assess its potential as a porphyry copper deposit. One of their better intersections came from drill hole VSTD01 on the northern edge of the deposit which gave 32m at 0.41 g/t Au and 0.73% Cu from 22m in supergene-enriched material.</p> <p>The Stavelly Project was optioned to Beaconsfield Gold Mines Pty Ltd in 2006 who flew an airborne survey and undertook an extensive drilling programme focused on several prospects including Thursday's Gossan. One of their diamond drill holes at Thursday's Gossan, SNDD001, encountered zones with quartz- sulphide veins assaying 7.7m at 1.08 g/t Au and 4.14% Cu from 95.3m and 9.5m at 0.44 g/t Au and 2.93% Cu from 154.6m along silicified and sheared contacts between serpentinite and porphyritic intrusive rocks.</p> <p>Once Beaconsfield Gold Mines Pty Ltd had fulfilled their option requirements, title of EL4556 passed to their subsidiary company, BCD Metals Pty Ltd, who undertook a gravity survey and extensive drilling at prospects including Thursday's Gossan. They also commissioned a maiden Mineral Resource estimate for Thursday's Gossan.</p> <p>All work conducted by previous operators at Thursday's Gossan is considered to be of a reasonably high quality.</p>
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>The Thursday's Gossan and Junction prospects are located in the Mount Stavelly Volcanic Complex (MSVC). Intrusion of volcanic arc rocks, such as the Mount Stavelly Volcanic Complex, by shallow level porphyries can lead to the formation of porphyry copper ± gold ± molybdenum deposits.</p> <p>The Thursday's Gossan Chalcocite deposit (TGC) is considered to be a supergene enrichment of primary porphyry-style copper mineralisation. Mineralisation is characterised by chalcopyrite, covellite and chalcocite copper sulphide mineralisation within a sericite, illite and kaolin clay alteration assemblage. Copper mineralisation is within a flat lying enriched 'blanket' of overall dimensions of 4 kilometres north-south by up to 1.5 kilometres east-west by up to 60 metres thick with an average thickness of approximately 20 metres commencing at an average depth below surface of approximately 30 metres. The majority (circa 60%) of the Mineral Resources reside within a</p>

Criteria	JORC Code explanation	Commentary
		<p>higher-grade zone of approximate dimensions of 1 kilometre x 300 metres by 35 metres thick.</p> <p>The Thursday's Gossan area hosts a major hydrothermal alteration system with copper-gold mineralisation over a 10 kilometre long corridor. The Junction porphyry target is defined by a coincident magnetic high, strong soil copper geochemistry, RAB drilling copper anomalism. Stavelly Minerals believes the technical evidence indicates there is significant porphyry copper-gold mineralisation potential at depth at Thursday's Gossan.</p>
Drill hole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <p><i>easting and northing of the drill hole collar</i></p> <p><i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i></p> <p><i>dip and azimuth of the hole</i></p> <p><i>down hole length and interception depth</i></p> <p><i>hole length.</i></p>	Included in the drill hole table in the body of the report.
	<p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	No material drill hole information has been excluded.
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>Exploration results are nominally reported where copper results are greater than 0.1% Cu over a down-hole width of a minimum of 3m.</p> <p>No top-cutting of high grade assay results have been applied, nor was it deemed necessary for the reporting of significant intersections.</p>
	<p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used</i></p>	<p>Stavelly Project</p> <p>Thursday's Gossan Prospect</p> <p>In reporting exploration results, length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x</p>

Criteria	JORC Code explanation	Commentary
	<i>for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	corresponding interval grade %) divided by sum of interval length.
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	No metal equivalent values are used for reporting exploration results.
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p>	<p>Stavely Project</p> <p>Thursday's Gossan Prospect</p> <p>There is insufficient drilling data to date to demonstrate continuity of mineralised domains and determine the relationship between mineralisation widths and intercept lengths.</p>
	<i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	Refer to the Tables and Figures in the text.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to Figures in the text. A plan view of the drill hole collar locations is included.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	<p>Stavely Project</p> <p>Thursday's Gossan Prospect</p> <p>All copper and gold values considered to be significant for porphyry mineralisation have been reported. Some subjective judgement has been used.</p>
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater,</i>	All relevant exploration data is shown on figures and discussed in the text.

Criteria	JORC Code explanation	Commentary
	<i>geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	
Further work	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<p>Stavely Project</p> <p>Thursday's Gossan Prospect</p> <p>Deep diamond drilling has been planned to target the core of the porphyry.</p>